


Easy to switch direction


XF-106

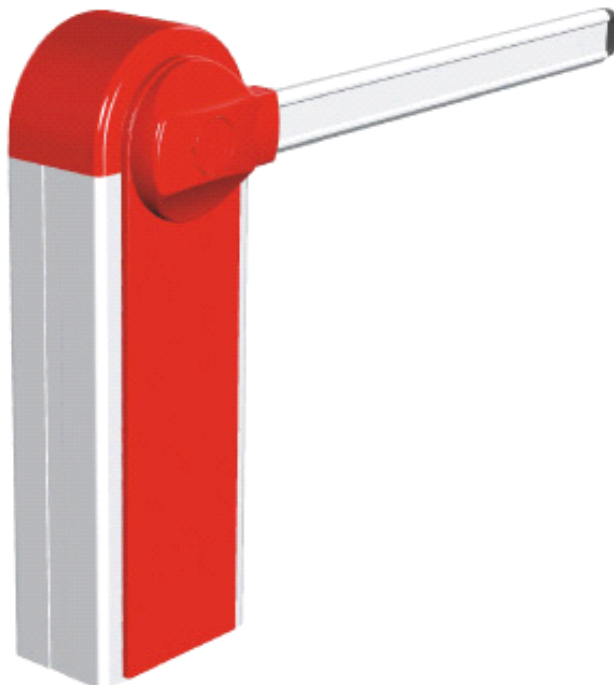

- 可轻松切换左机、右机
- 可配滚动显示屏 (选配)

- 连续运行不会过热停机
- 强冷天气, 照常运行

Dimensions

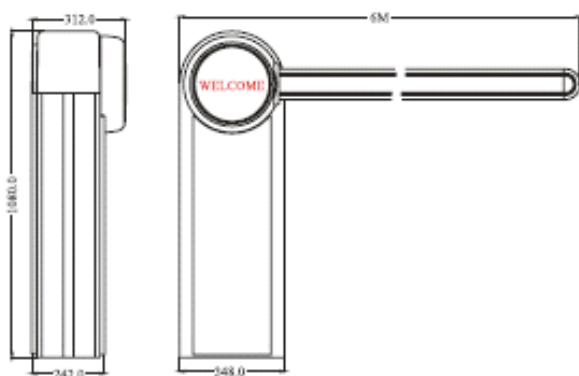

Technical Data


Model:	XF-106 (AC)	XF-106 (DC)
Power supply:	220VAC 50Hz	220VAC 50Hz
Motor's power:	90W 220VAC	80W 24VDC
Max length of Boom :	6M	6M
Time for up/down:	2S(for 1-3M)	2S(for 1-3M)
	6S(for 4-6M)	6S(for 4-6M)
Environment temperature:	-20℃--50℃	-20℃--50℃
Protection class:	IP44	IP44



XF-306

- 连续运行不过热停机
- 停电时可轻松离合,手动起落杆
- 强冷天气,照常启动

Dimensions

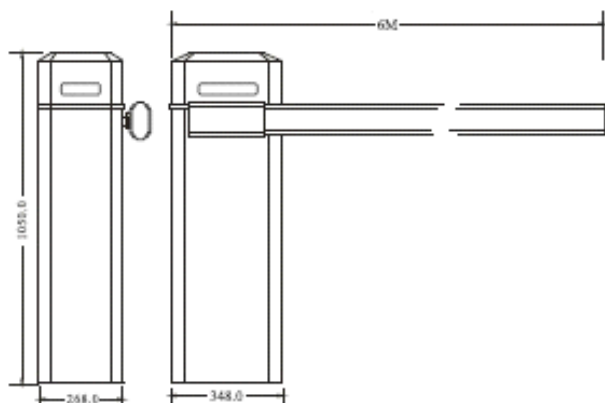

Technical Data


Model:	XF 306 (AC)	XF-306 (DC)
Power supply:	220VAC 50Hz	220VAC 50Hz
Motor's power:	90W 220VAC	80W 24VDC
Max length of Boom :	6M	6M
	2S(for 1-3M)	2S(for 1-3M)
Time for up/down:	6S(for 4-6M)	6S(for 4-6M)
Environment temperature:	-20℃--50℃	-20℃--50℃
Protection class:	IP44	IP44



XF-606

- 连续运行不过热停机
- 停电时可轻松离合,手动起落杆
- 强冷天气,照常启动

Dimensions

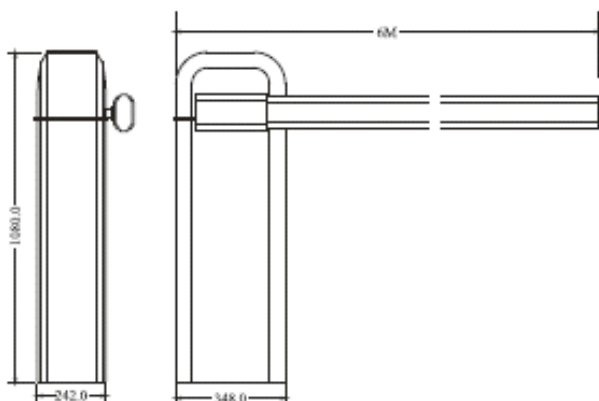

Technical Data

Model:	XF 606 (AC)	XF-606 (DC)
Power supply:	220VAC 50Hz	220VAC 50Hz
Motor's power:	90W 220VAC	80W 24VDC
Max length of Boom :	6M	6M
Time for up/down:	2S(for 1-3M)	2S(for 1-3M)
	6S(for 4-6M)	6S(for 4-6M)
Environment temperature:	-20℃--50℃	-20℃--50℃
Protection class:	IP44	IP44

WWW.DOORSWORLD.COM

TEL: 0086-510-8102633 FAX: 0086-510-83773086


E-mail: xfdoor@gmail.com



XF-806

- 连续运行不过热停机
- 停电时可轻松离合,手动起落杆
- 强冷天气, 照常启动

Dimensions

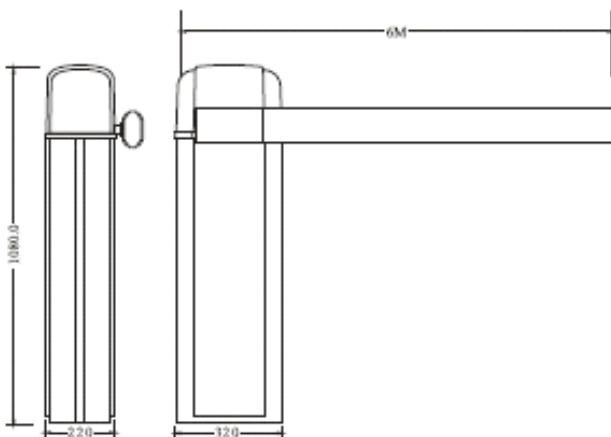

Technical Data

Model:	XF-806 (AC)	XF-806 (DC)
Power supply:	220VAC 50Hz	220VAC 50Hz
Motor's power:	90W 220VAC	80W 24VDC
Max length of Boom :	6M	6M
Time for up/down:	2S(for 1-3M)	2S(for 1-3M)
	6S(for 4-6M)	6S(for 4-6M)
Environment temperature:	-20℃--50℃	-20℃--50℃
Protection class:	IP44	IP44

WWW.DOORSWORLD.COM

TEL: 0086-510-8102633 FAX: 0086-510-83773086

E-mail: xfdoor@gmail.com